




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101160

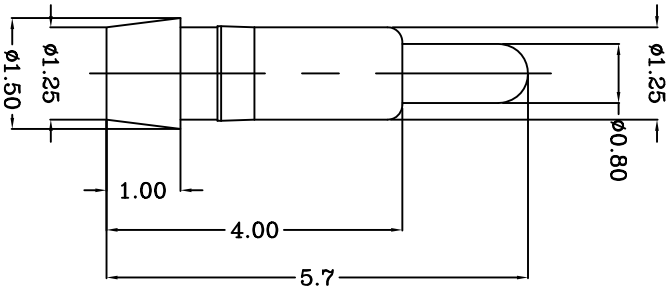

TOP-LINK

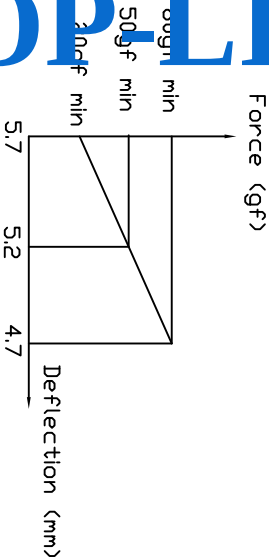

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.25um Nickel plating

2)Plunger: Min 0.5um Gold plating over min. 1.25um Nickel plating

3

Mechanical

1)Total stroke : 1.5mm

2)Durability: 10,000 cycle min.

4

Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

USED ON

-

101160-1

PART NUMBER



MATL

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0 = ± -

0.0 = ±0.10

0.00 = ± -

0.000 = ±

ANGLE: ±1°

SURF TEXTURE: 32/

REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

HT TR

-

FIN

-

✓

Top-Link
Electronics Ltd.

CHK
LANSLING HSTAD

NAME

PGGD PIN

PG-1.5-1.0-1.25-4.0-5.7

SCALE
1:1

A4

DWG
NO.

101160

SHEET
1 OF 1

REV
A

4

3

2

1