





THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.


C-200056

POINT OF MEASUREMENT PICK&PLACE AREA

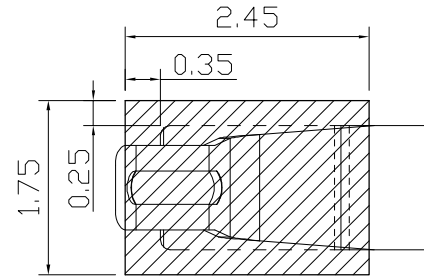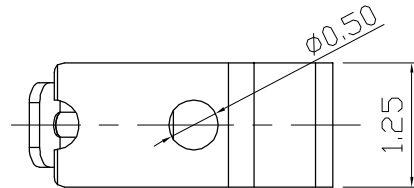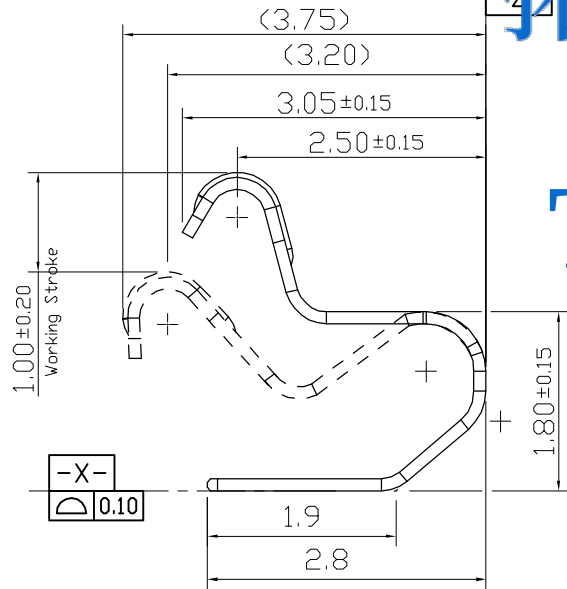

RECOMMEND PCB LAYOUT
TOLERANCE=±0.05

PAD OF PCB.



拓普联科

TOP-LINK

NOTES:

1. MATERIAL:
COPPER ALLOY, THICKNESS=0.12.
2. PLATING:
1.25um(50u")Min Ni UNDER PLATING.
0.25um(1u")Min Au PLATING OVER ALL.

3. SPECIFICATION:

3.1 ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 1.0A.
VOLTAGE RATING : 50 VAC/DC.
LOW LEVEL CONTACT RESISTANCE: 50mΩ MAX

3.2 MECHANICAL CHARACTERISTICS:

CONTACT NORMAL FORCE: 30gf Min PER PIN AT
WORKING STROKE
DURABILITY : MATED 10,000 CYCLES AT WORKING STROKE
WITHOUT DEGRADING

3.3 ENVIRONMENTAL CHARACTERISTICS:

OPERATING TEMPERATURE RANGE : -20°C TO +70°C.

4. TAPE & REEL PACKAGING PER EIA481 STANDARD.

5. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.

6. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"

200056-1	2	CARRIER TAPE	P=8mm	WHITE, W=**mm, Q'ty/REEL=**** Pcs
	1	3.2H 1.25W ANTENNA CLIPS	1Pcs	NOTES 1,2
ASSEMBLY NUMBER	ITEM	PART NAME	Q'TY	DESCRIPTION

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0 = ±
0.0 = ±0.20
0.00 = ±0.15

ANGLE:
0 = ±3°
0.0 = ±1.5°

REMOVE BURRS. BREAK
SHARP EDGES R0.10 MAX
DO NOT SCALE PRINT

MATL				HT TR —		FIN — 	
DWN		APVD		<i>top-Link</i> <i>Electronics</i> Top-Link Electronics Ltd.			
CHK		REL					
NAME							
CUSTOMER DRAWING FOR 3. 2H, 1. 25W, ANTENNA CLIPS							
SCALE	1:1	A4	DWG NO.	C-200056		SHEET	REV
						1 OF 1	1

LDC
-
DIST
-

4

3

2

1

A