



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.





DWG NO.

C-200057

POINT OF MEASUREMENT PICK&PLACE AREA

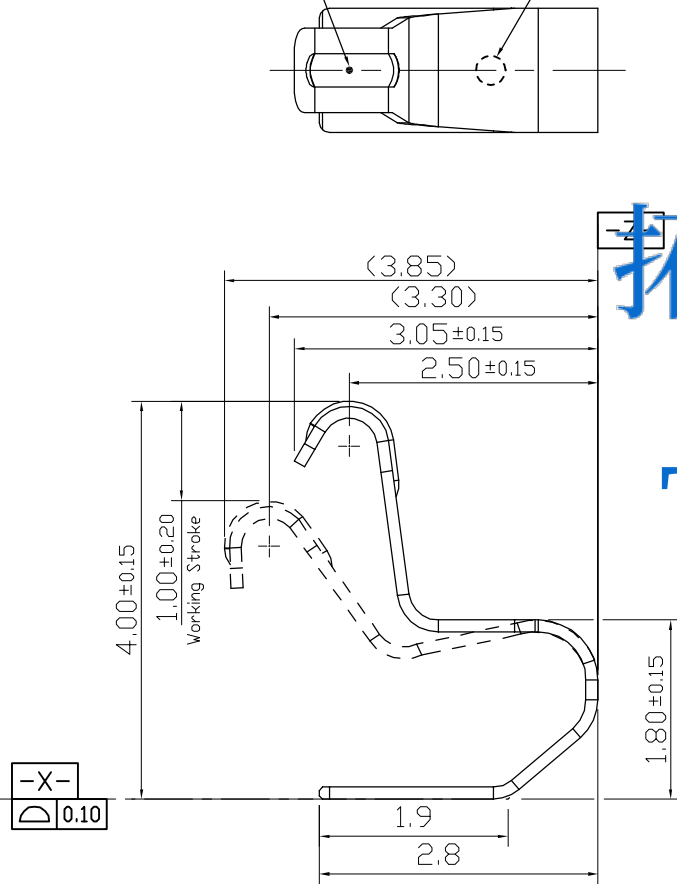


-X-
0.10

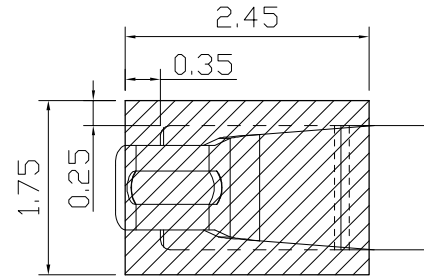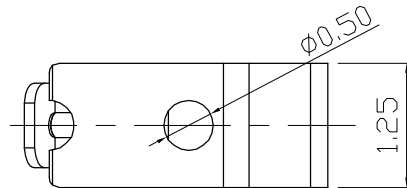

RECOMMEND PCB LAYOUT
TOLERANCE=±0.05

PAD OF PCB.



拓普联科

TOP-LINK

NOTES:

1. MATERIAL:
COPPER ALLOY, THICKNESS=0.12.
2. PLATING:
1.25um(50u")Min Ni UNDER PLATING.
0.25um(1u")Min Au PLATING OVER ALL.
3. SPECIFICATION:
3.1 ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 1.0A.
VOLTAGE RATING : 50 VAC/DC.
LOW LEVEL CONTACT RESISTANCE:50mΩ MAX

- 3.2 MECHANICAL CHARACTERISTICS:
CONTACT NORMAL FORCE: 30gf Min PER PIN AT
WORKING STROKE
DURABILITY : MATED 10,000 CYCLES AT WORKING STROKE
WITHOUT DEGRADING

- 3.3 ENVIRONMENTAL CHARACTERISTICS:
OPERATING TEMPERATURE RANGE : -20°C TO +70°C.

4. TAPE & REEL PACKAGING PER EIA481 STANDARD.
5. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.
6. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"

200057-1	2	CARRIER TAPE	P=8mm	WHITE, W=**mm, Q'ty/REEL=**** Pcs
	1	3.6H 1.25W ANTENNA CLIPS	1Pcs	NOTES 1,2
ASSEMBLY NUMBER	ITEM	PART NAME	Q'TY	DESCRIPTION

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED 0 = ± 0.0 = ±0.20 0.00 = ±0.15 ANGLE: 0 = ±3° 0.0 = ±1.5° REMOVE BURRS. BREAK SHARP EDGES R0.10 MAX DO NOT SCALE PRINT	MATL			HT TR		—	FIN		— 		
	DWN		APVD								
	CHK		REL								
	NAME						CUSTOMER DRAWING FOR 4.0H, 1.25W, ANTENNA CLIPS				
SCALE		1:1	A4	DWG NO.		C-200057		SHEET	1 OF 1	REV	1

LDC
-
DIST
-

	NEW		
LTR	REVISION RECORD	APVD	DATE

USED ON

—