
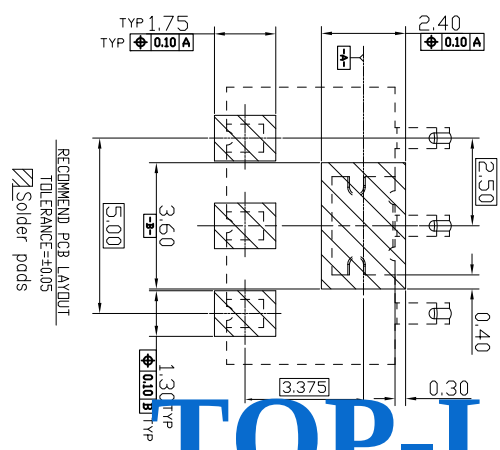
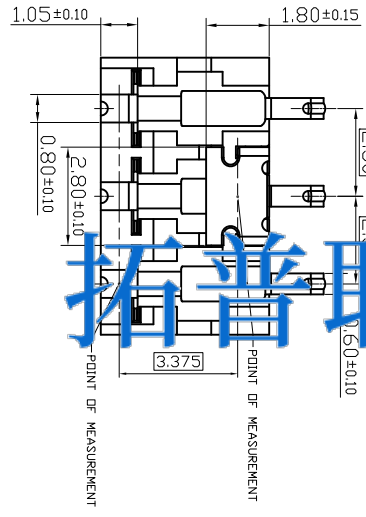

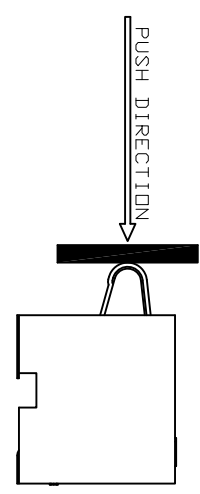
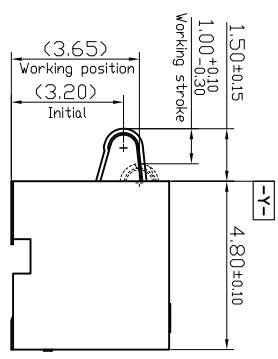
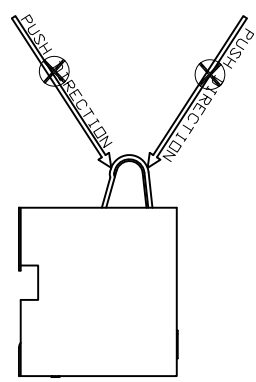
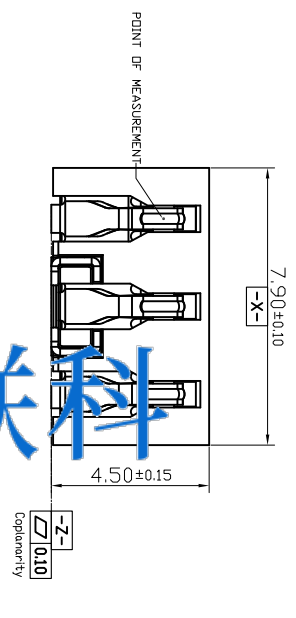


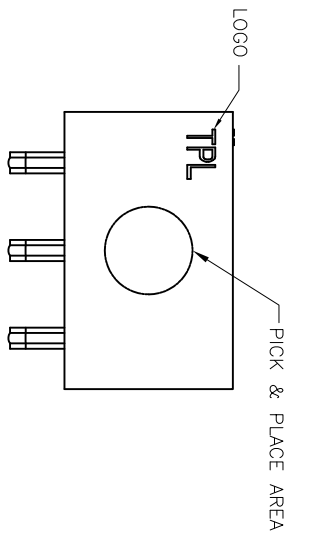

TOP-LINK

- NOTES:
1. SPECIFICATION:
 - 1.1 ELECTRICAL CHARACTERISTICS:
VOLTAGE RATING : 200V AC/DC
CURRENT RATING:1.0A
LOW LEVEL CONTACT RESISTANCE:50mΩ Max.
 - 1.2 MECHANICAL CHARACTERISTICS:
CONTACT NORMAL FORCE:80gf Min PER PIN AT WORKING STROKE
 - 1.3 ENVIRONMENTAL CHARACTERISTICS:
OPERATING TEMPERATURE RANGE : -20°C TO +70°C.
 2. TAPE & REEL PACKAGING PER EIA481 STANDARD.
 3. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.
 4. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"

Item	Part Name	Q'ty	Material	Finish
4	Carrier tape	1/1000	Transparency	W=16mm,Q'ty/REEL=1000 Pcs.
3	Pad	1	Brass	Ni:100u"Min over all;Sn:150u"Min over all
2	Contact	3	Copper alloy	Au:1u" Min over all,
1	Housing	1	High temp.Plastic; UL94 V-0 Color Black	Au:10u"Min on contact area

Type	Customer drawing	Unit	mm
DWN:	Coiwanlu	APVD:	Lansing
CHK:	Henry	REL:	
NAME	ASSEMBLY DRAWING FOR 3PIN 2.5PITCH 4.5H BATTERY		

top-link

Item	Revision record	Date
B	Update	2017.07.18
A	New Release	2011.07.12

Top-link
Electronics Ltd.
TOLERANCES UNLESS
OTHER SPECIFIED
0.0 = ±0.20
0.00 = ±0.15
0.000 = ±0.1
Angle: ±3°
SURF. TEXTURE:
REMOVE BURRS,
BREAK SHARP EDGES
R0.05 MAXDO NOT
SCALE PRINT.

Scale	Size	Part NO.	Page	Rev:
1:1	A4	200010-3	1/1	B