



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101085

LOC	-
DIST	-

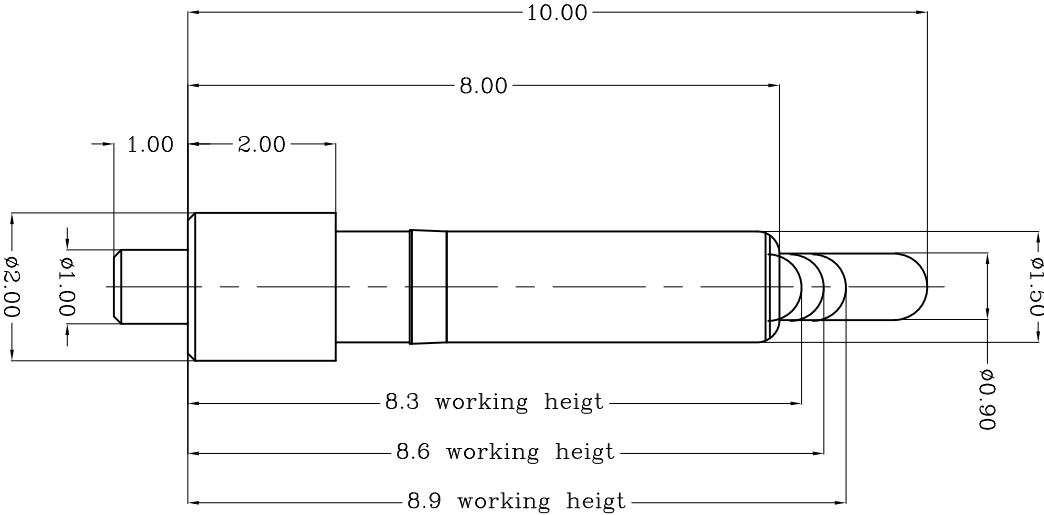

TOP-LINK

Notes:
Material:

- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2.
- 2)Spring : Stainless steel wire

2 Plating


- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
- 2)Plunger: Min 0.4um Gold plating over min. 2.5um Nickle plating

3 Mechanical

- 1)Total stroke : 1.9mm
- 2)Durability: 10,000 cycle min.

4 Electrical

- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

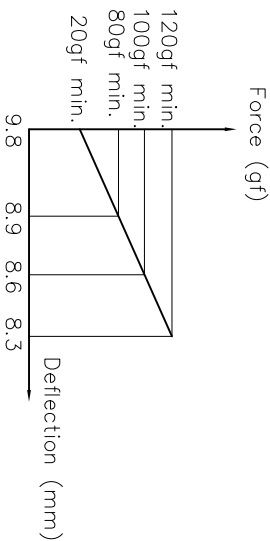

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±-		
0.0	= ±0.10		
0.00	= ±-		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN		APVD	
Benny		Lansing	
CHK		REL	
Andy			
NAME	POGO PIN		
SCALE	1:1	A4	DWG NO.
			C-101085
			SHEET 1 OF 1
			REV A

101085-1
PART NUMBER

Top-Link
Electronics Ltd.

USED ON

-