



LOC	-
DIST	-

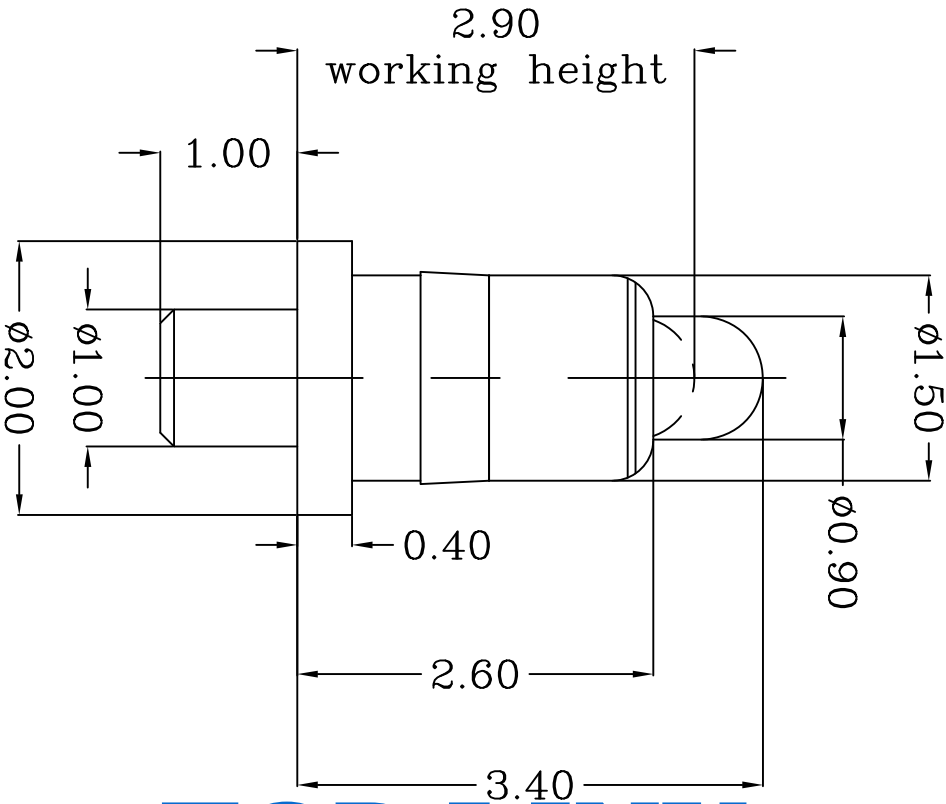

TOP-LINK

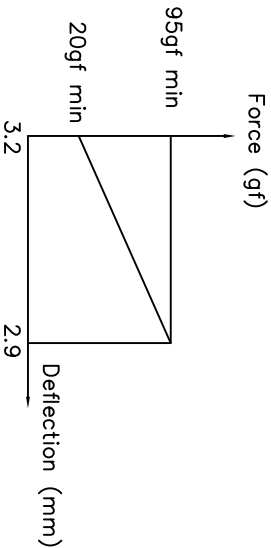

- Notes:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2.
 - 2)Spring : Stainless steel wire
 - 2 Plating
 - 1)Body: Gold plating over Nickle plating
 - 2)Plunger: Gold plating over Nickle plating
 - 3 Mechanical
 - 1)Total stroke : 0.75mm
 - 2)Durability: 10,000 cycle min.
 - 4 Electrical
 - 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC

USED ON

-

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±-		
0.0	= ±0.10		
0.00	= ±-		
0.000	= ±		
ANGLE:	±1°		
SURF TEXTURE:		3.2/	✓
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL		HT TR	—
DWN	APVD		
Benny	Lansing		
CHK	REL		
Andy			
NAME		POGO PIN	
PG-1.0-1.0-2.0-0.4-1.5-2.6-3.4			
SCALE	A4	DWG NO.	C-101086
1:1		SHEET	1 OF 1
		REV	A