



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101150

LDC
-
DIST
-

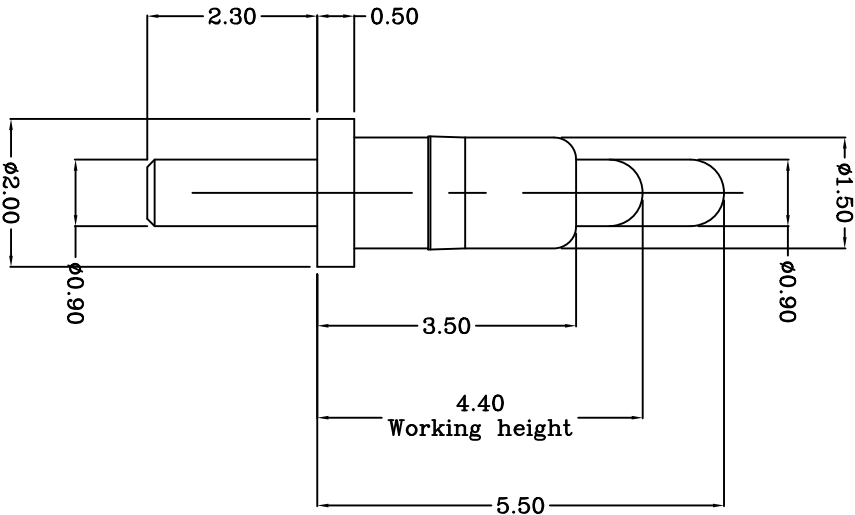

TOP-LINK

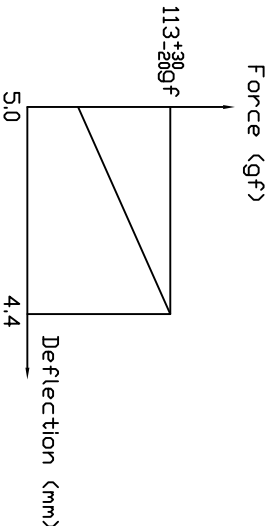

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire

2 Plating

1)Body: 0.1um Gold plating over min. 1.25um Nickle plating

2)Plunger: 0.4um Gold plating over min. 1.25um Nickle plating

3 Mechanical

1)Total stroke : 1.5mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATERIAL				HT TR				FIN			
0	= ± -	0.0	= ± 0.10	0.00	= ± -	0.000	= ±	ANGLE: ±1°	SURF TEXTURE: 32/	REMOVE BURRS, BREAK	SHARP EDGES R0.05 MAX	DD NOT SCALE PRINT	NAME	POGO PIN	PG-0.9-2.3-2.0-0.5-1.5-3.5-5.5
DWN				Benny				APVD				Lansing			
CHK				Andy				REL				Top-Link Electronics Ltd.			
SCALE				1:1				A4				DWG NO. C-101150			
SHEET				1 OF 1				REV				A			

USED ON

-

101150-1

PART NUMBER

Top-Link Electronics Ltd.