



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101174

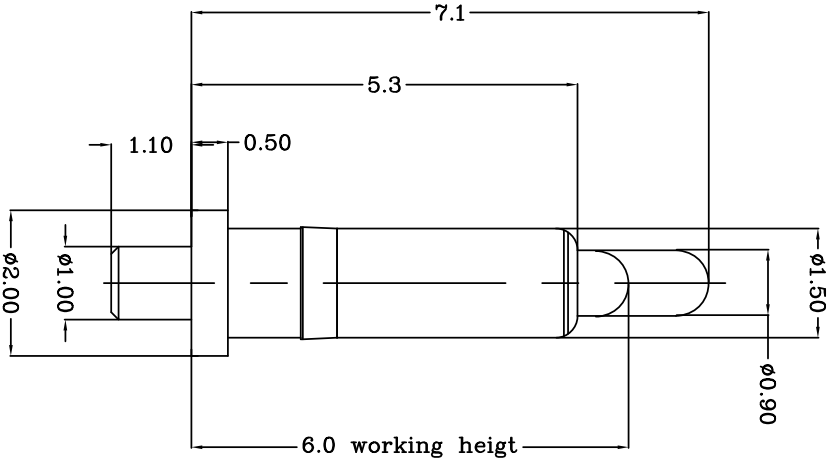

TOP-LINK

Notes:
Material:


1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire

1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating

3 Mechanical
1)Total stroke : 1.4mm
2)Durability: 10,000 cycle min.

4 Electrical
1)Contact resistance: 30mOhm Max.
2)Operating voltage: 36VDC

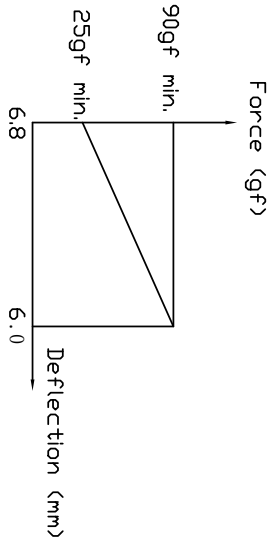

USED DN

101174-1
P/N

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	HT TR	FIN	
DWN	APVD	Lansing	Top-Link
CHK		REL	Electronics Ltd.
Any			

NEW	080320	PGGD PIN	PG-1.0-1.1-2.0-0.5-1.5-5.3-7.1	SHEET	REV
REVISION	DATE	NAME	SCALE	DWG	NO.
RECORD	APVD	SCALE	1:1	A4	C-101174
LTR					

LDC	
DIST	

4

3

2

1