




DIST

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2>Total stroke : 3.4mm
 - 3 Electrical performance
Resistance:50mOhm Max.Current rating: 2.0A
 - 4 RoHS compliant.

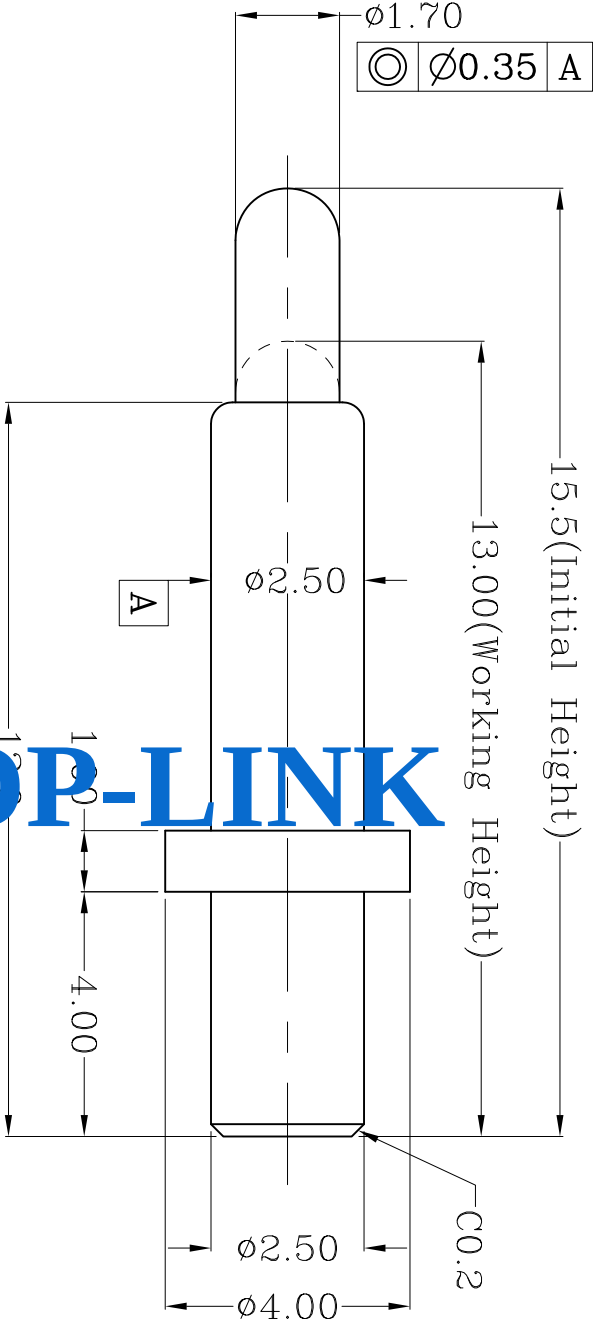

TOP-LINK

Table 1 Mechanical performance

working height	13.0mm	80±25gf <2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight		
TOLERANCES UNLESS OTHER SPECIFIED		DWG:	Qin zuozhong	APVD:	Top-Link Electronics Top-Link Electronics Ltd.			
0.0 = ±0.15		CHK:		REL:				
0.00 = ±0.10		Name POGO PIN						
0.000 = ±0.005								
Angle: ±1°								
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DD NOT SCALE PRINT.		Scale	Size	DWG No.	Page	Rev.		
		1:1	A4	C-101207	1/1	B		