



LDC
-
DIST
-

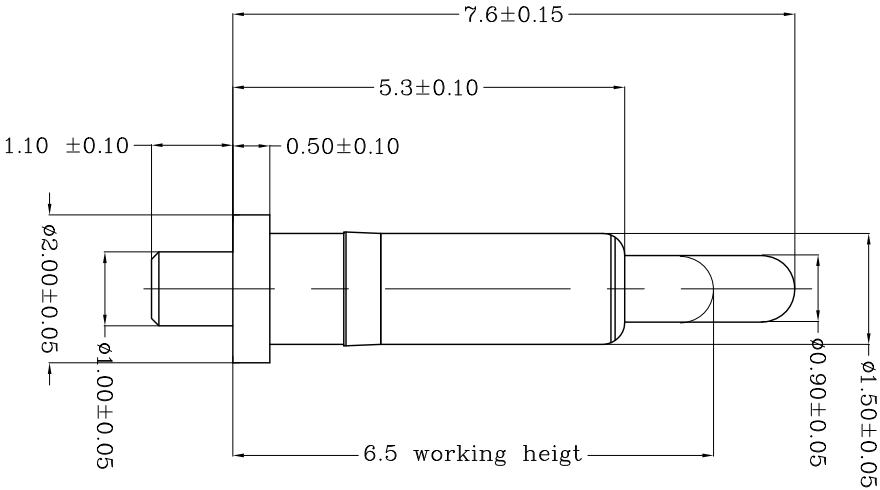

TOP-LINK

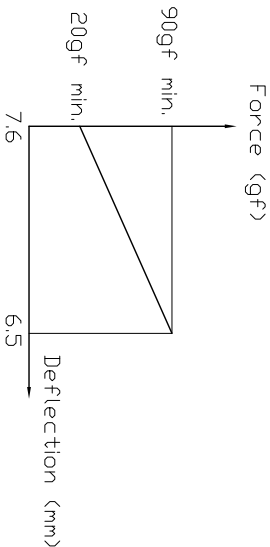

Notes:

- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
- 2)Spring : Stainless steel wire
- Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- Mechanical
- 1)Total stroke : 1.4mm
- 2)Durability: 10,000 cycle min.
- Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

NEW				
REVISION				
RECORD				
L TR				

DIMENSIONS IN MM				
TOLERANCES UNLESS				
OTHER SPECIFIED				
0	= ± -			
0.0	= ±0.15			
0.00	= ± 0.10			
0.000	= ±			
ANGLE: ±1°				
SURF TEXTURE: 3.2/ V				
REMOVE BURRS, BREAK				
SHARP EDGES R0.05 MAX				
DO NOT SCALE PRINT				
MATL		HT TR		FIN
DWN		APVD		
QIN		REL	<i>Top-Link Electronics</i>	
CHK			Top-Link Electronics L.td.	
NAME				
POGGO PIN				
PG-1.0-1.1-2.0-0.5-1.5-5.3-7.6				
SCALE	A4	DWG NO.		
1:1		C-101220	SHEET 1 OF 1	REV A

101220-1
PART NUMBER

USED ON

-