



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101244

LDC
-
DIST
-

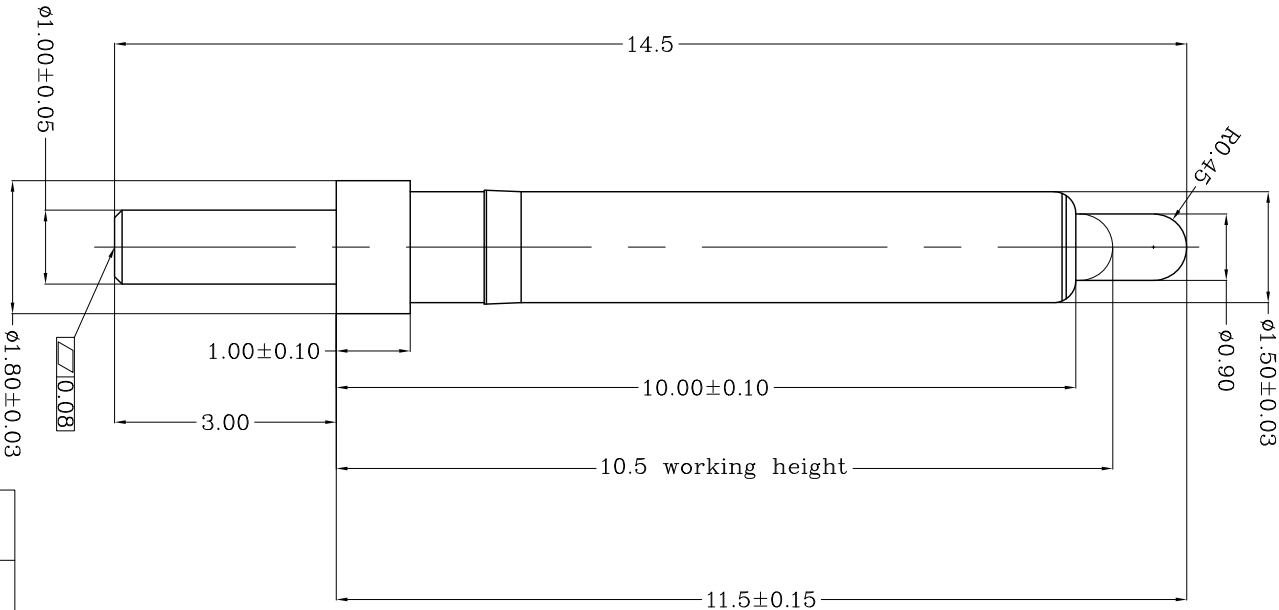

TOP-LINK

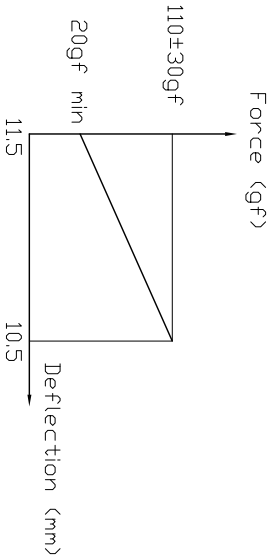

Notes:

Material:

1)Plunger & Body : Brass

2)Spring : Stainless steel wire

2 Plating

1)Body: 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: 0.4um Gold plating over min. 1.4um Nickle plating

3 Mechanical

1)Total stroke : 1.4mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

3)Operating temperature: -40°C to 100°C

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				SURF TEXTURE: 32/ V							
0	= ± -			REMOVE BURRS, BREAK	SCALE	1:1	A4	DWG NO.	C-101244	SHEET 1 OF 1	REV A
0.0	= ±0.15			SHARP EDGES R0.05 MAX	PG-1.0-3.0-1.8-1.5-10-11.5						
0.00	= ± 0.10			DO NOT SCALE PRINT							
0.000	= ±			ANGLE: ±1°							
NAME					PGGD PIN						
DWN					qin		APVD Lansing		<i>Top-Link Electronics</i> Top-Link Electronics Ltd.		
CHK					Jim		REL				

USED ON

-

101244-1

PART NUMBER

A

B

C

D