
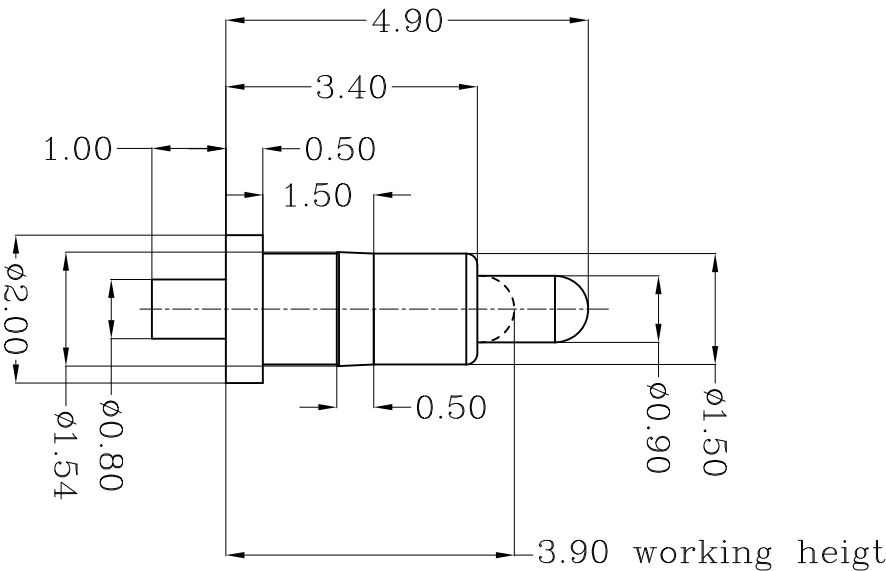




TOP-LINK

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)

or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

3 Mechanical


1)Total stroke : 1.4mm

2)Durability: 10,000 cycle min.

Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

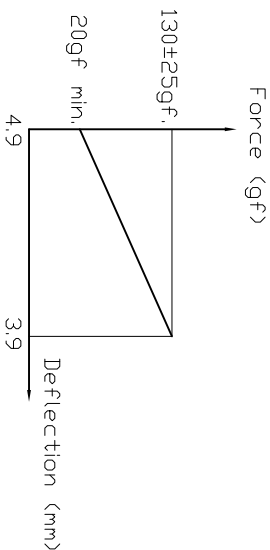

USED ON

-

101256-1

PART NUMBER

MATL	HT TR	FIN
	—	—

DWN	APVD	Top-Link Electronics Ltd.
QIN	Lansing	
CHK	REL	
Jim		

NAME	PGGD PIN
SCALE	PG-0.8-1.0-2.0-0.5-1.5-3.4-4.9

A4	DWG	SHEET	REV
1:1	ND	1 OF 1	A

REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX	DD NOT SCALE PRINT
---	--------------------

DIMENSIONS IN MM
TOLERANCES UNLESS OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/

DATE	APVD	REVISION RECORD	LTR
080813			

LDC	DIST
-	-