




LDC
-
DIST
-

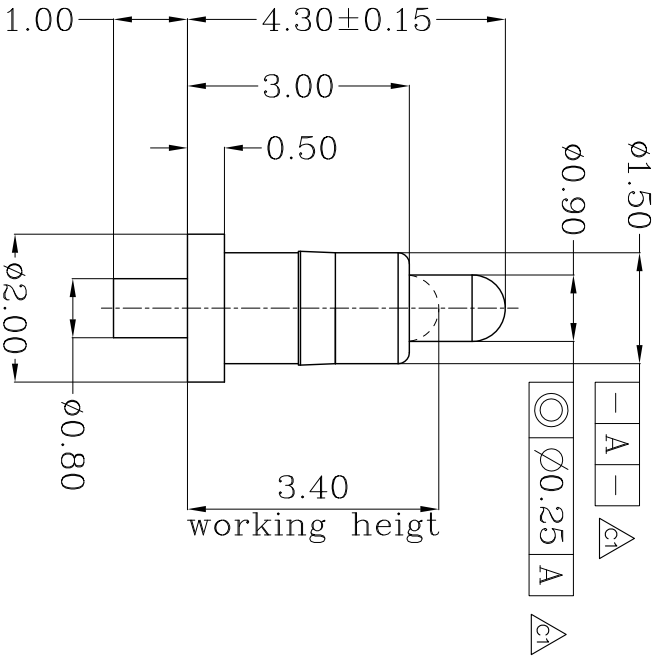

Recommended PCB Layout



TOP-LINK

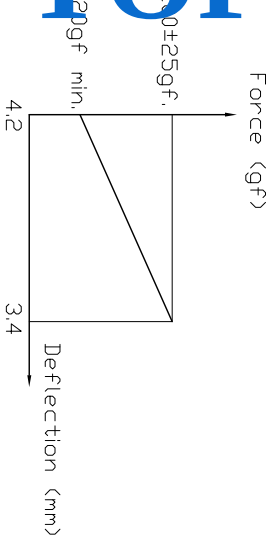

Notes:
1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
2)Spring : Stainless steel wire
2 Plating
1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating
2)Durability: 10,000 cycle min.
Electrical
1)Contact resistance: 30mOhm Max.
2)Operating voltage: 36VDC

C1	Update	121231
C	pp 加长	080919
B	Add body length	080901
A	NEW	080813
L TR	REVISION RECORD	APVD DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT

MATL	1	HT TR	—	FIN	—
DWN	Qin	APVD			
CHK		REL			
NAME	POGGO PIN				
SCALE	1:1	A4	DWG NO.	C-101257	SHEET 1 OF 1
REV	C1				

101257-1
PART NUMBER