




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101334

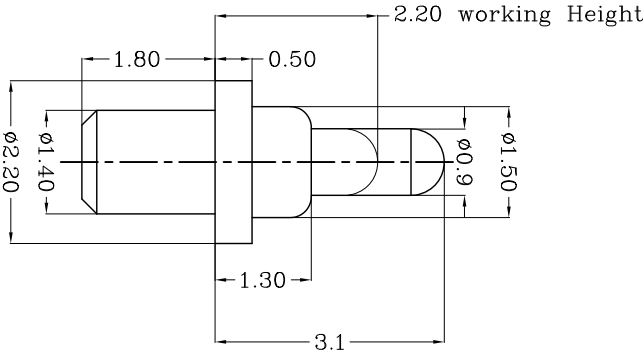

TOP-LINK

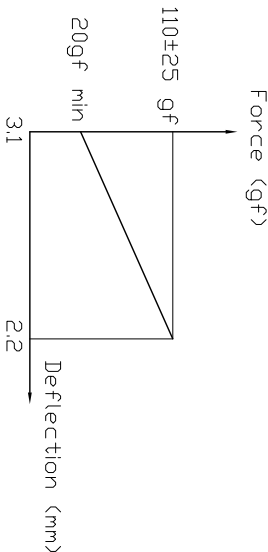

Notes:
Material:

- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2 or CuZn36(C2700).
- 2)Spring : Stainless steel wire
- 2)Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3 Mechanical
- 1)Total stroke : 1.1mm
- 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

USED DN
-

101334-1

PART NUMBER

MATL	HT TR	FIN
1	-	-

DWN	APVD	REL
Qin	Lansing	Top-Link Electronics Ltd.
CHK	REL	
Jim		

NAME	SCALE	DWG NO.	SHEET	REV
POGDO PIN Customer Drawing	1:1	A4	1 OF 1	A
PG-1.4-1.8-2.2-0.5-1.5-1.3-3.1		C-101334		

REMOVE BURS, BREAK SHARP EDGES R0.05 MAX	DO NOT SCALE PRINT
32/	

DIMENSIONS IN MM
TOLERANCES UNLESS OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/

DATE	APVD	REVISION RECORD	L TR
2009/02/19			

LDC	DIST
-	-

4

3

2

1