




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO. C-101353

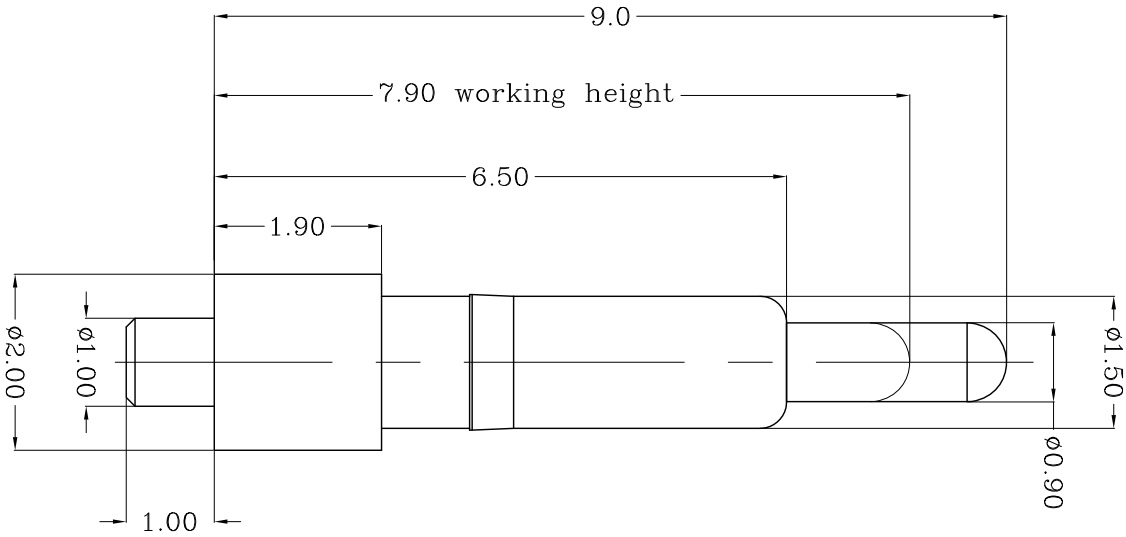

Recommended Solder paste thickness is 0.10 mm
Recommended PCB Layout

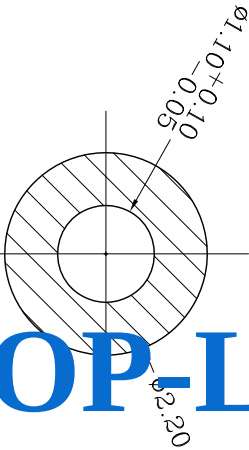

TOP-LINK

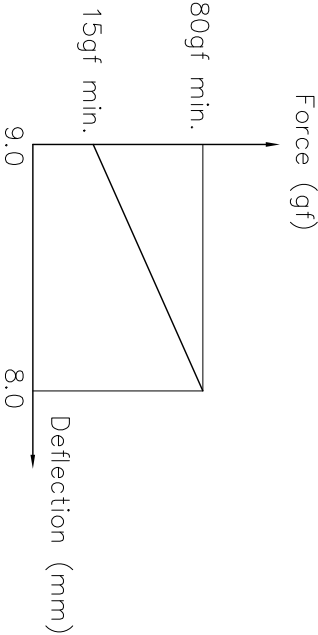

- Notes:
- △ Material:
- 1)Plunger & Body : Brass
 - 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: 0.1um Gold plating over min. 1.4um Nickle plating
 - 2)Plunger: 0.4um Gold plating over min. 1.4um Nickle plating
- 3 Mechanical
- 1)Total stroke : 1.8mm

USED ON

—

LOC
—
DIST
—

L TR	NEW		09/04/21
REVISION			
RECORD			
APVD			
DATE			

DIMENSIONS IN MM				TOLERANCES UNLESS			
OTHER SPECIFIED				0			
0				= ±			
0.0				= ±0.15			
0.00				= ±0.10			
0.000				= ±			
ANGLE: ±1°							
SURF TEXTURE: 3.2/							
REMOVE BURRS. BREAK							
SHARP EDGES R0.05 MAX							
DO NOT SCALE PRINT							
MATL		HT TR	—		FIN	— 	
DWN	Qin	APVD	Lansing		Top-Link <i>Electronics</i>		
CHK	Andy	REL	Top-Link Electronics Ltd.				
NAME		POGO PIN					
SCALE		PG-1.0-1.0-2.0-1.9-1.5-6.5-9.0					
1:1		A4	DWG NO.	C-101353		SHEET 1 OF 1	REV A