


DWG NO.
C-101381

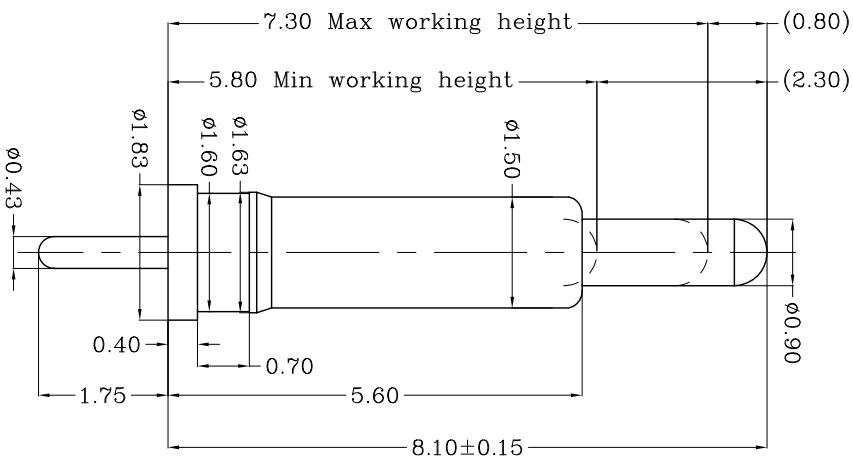

TOP-LINK

Notes: Mate

erial:

body : C36000

number: C36000 or C27000

Spring : Stainless steel wire

ing

body: Min 0.1μm Gold plating over min. 1.4μm Nickel plating

runner: Min 0.4um Gold plating over min 1.4um Nickel plating

mechanical

Total stroke : 24mm

durability: 10 000 cycle min

Electric

contact resistance: 30mOhm Max

Operational voltage: 25VDC MAX

operating voltage: 30VDC MAX.

LDC				2009/09/02
-				
DIST				2009/09/01
-				

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL		HT TR	—	FIN	— 
0	= $\pm$	DWN	APVD	<i>Top-Link</i>		Top-Link	
0.0	= ± 0.15	qin		<i>Electronics</i>		Electronics L td.	
0.00	= ± 0.10	CHK	REL				
0.000	= $\pm$						
ANGLE: $\pm 1^\circ$							
SURF. TEXTURE: $3.2/\sqrt{\quad}$		NAME					
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX		P Q G D		P I N		P G-0.43-1.75-1.83-0.4-1.5-5.6-8.1	
DO NOT SCALE PRINT		SCALE	A4	DWG NO.	C-101381	SHEET 1 OF 1	REV B

101381-1
PART NUMBER

USED ON