


DWG NO.
C-101409

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

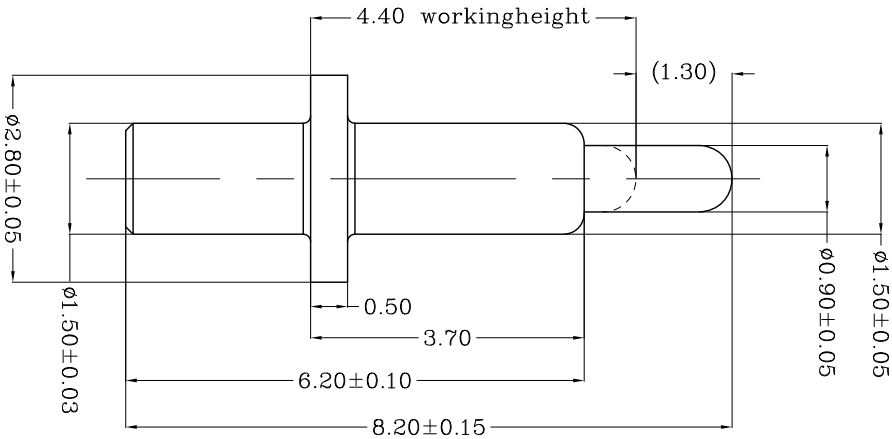

Notes:
△ Material(材质):

1)Body : Brass

2)Plunge : Brass

3)Plating : Stainless steel wire
2)Plating(电镀):

1)Body: 0.1um Gold plating over 1.4 Nickel plating

(Body: 镀金0.1um 镍底1.4um)

Plunger: Min 0.4um Gold plating over 1.4um Nickel plating

(Plunger: 镀金0.4um 镍底1.4um)

3)Durability(机械性能):

1)Force: 110±25gf per pin at 1.3mm stroke

(力: 下压1.3mm的力: 110±25gf)

2)Total stroke(总行程) : 2.00mm

3)Durability(寿命): 10,000 cycle min.

4)Electrical(电性能)

1)Contact resistance(接触抵抗): 30mOhm Max.

2)Voltage rating(额定电压): 36V DC Max

3)Current rating(额定电流): 2.0A

USED ON
-

101409-1
PART NUMBER

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.10		
0.00	= ± 0.05		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			

OTHER SPECIFIED	DWN	APVD	<i>Top-Link</i> <u>Electronics</u> Top-Link Electronics L td.	
0 = ±-	Qin			
0.0 = ±0.10				
0.00 = ±0.05	CHK	REL		
0.000 = ±				
ANGLE: ±1°				
SURF TEXTURE: 32/	NAME PGGD PIN			
REMOVE BURRS. BREAK	PG-1.5-2.5-2.8-0.5-1.5-6.2-8.2			
SHARP EDGES. R0.05 MAX				
DO NOT SCALE PRINT	SCALE	A4	DWG NO.	C-101409
	1:1		SHEET 1 OF 1	REV 2

A

B

C

D

4

3

2

1