


DWG NO.
101425

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC
-
DIST
-

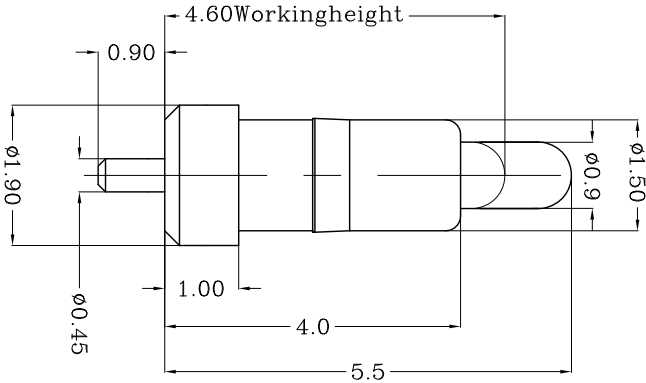

- Notes:
△ Material (材质):
1) Body : Brass
2) Plunger : Brass
3) Plating : Stainless steel wire
2 Plating (电镀):
1) Plating: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
3 Mechanical (机械性能):
1) Force: 90±35gf per pin at 0.9mm stroke (力: 90.9mm 的力: 90±35gf)
2) Total stroke (总行程) : 1.20mm
3) Reliability (寿命): 10,000 cycle min.
4 Electric (电性能)
1) Contact resistance (接触抵抗): 30mOhm Max.
2) Voltage rating (额定电压): 36V DC Max
3) Current rating (额定电流): 2.0A

L TR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± .0			0.0	= ± 0.15		
0.00	= ± 0.10			0.000	= ± .000		
ANGLE: ±1°				SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				DO NOT SCALE PRINT			
NAME		SCALE		DWG NO.		PGGD PIN	
CHK		1:1		A4		PG-0.45-0.9-1.9-1.0-1.5-4.0-5.5	
REL						101425	
Top-Link Electronics Ltd.						SHEET 1 OF 1	
						REV A	

101425-1
PART NUMBER

USED ON
-