


DWG NO. C-101445

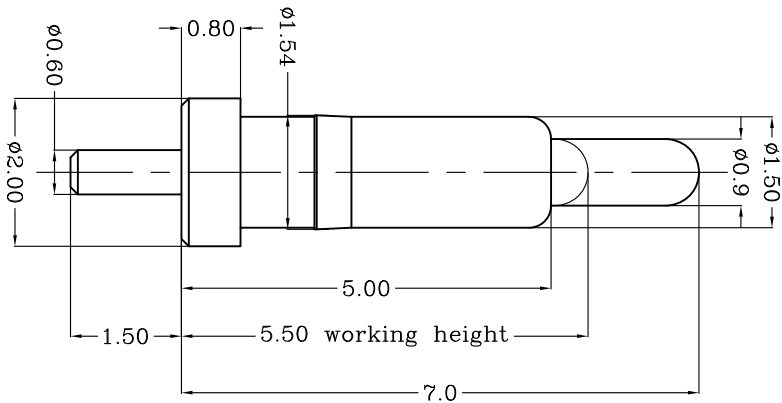

Notes:

① Material(物质):

- # OPTIONAL
- 1) Body: Brass
 - 2) Plunger: Brass
 - 3) Spring: Stainless steel wire
- 2 Plating (电镀):
- 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Bottom: 0.1um Min 镍底1.4um Min)
 - 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3 Mechanical (机械性能):
- 1) Force: 80 ± 35 gf per pin at 1.5mm stroke (力: 下压1.5mm的力: 80 ± 35 gf)
 - 2) Total stroke (总行程): 1.90mm
 - 3) Duty (寿命): 10,000 cycle min.
- 4 Electrical (电性能)
- 1) Contact resistance (接触阻抗): 30mOhm Max.
 - 2) Voltage rating (额定电压): 36V DC Max
 - 3) Current rating (额定电流): 2.0A

LDC	-
DIST	-

	更新		2010/12/22
	NEW		2010/06/30
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM		MATERIAL		HT TR		FIN	
TOLERANCES UNLESS OTHER SPECIFIED				—		— 	
0	= ±-	DWN	APVD	<u>Top-Link</u>		Top-Link	
0.0	= ±0.15	qin		<u>Electronics</u>		Electronics L.td.	
0.00	= ±0.10	CHK	REL				
0.000	= ±-						
ANGLE: ±1°							
SURF. TEXTURE: $3.2/\sqrt{\text{mm}}$		NAME POGO PIN					
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX		SCALE	A4	DWG NO.	C-101445	SHEET 1 OF 1	REV B
DO NOT SCALE PRINT		1:1					

101445-1	PART NUMBER
----------	-------------

USED ON