


DWG NO. C-101449

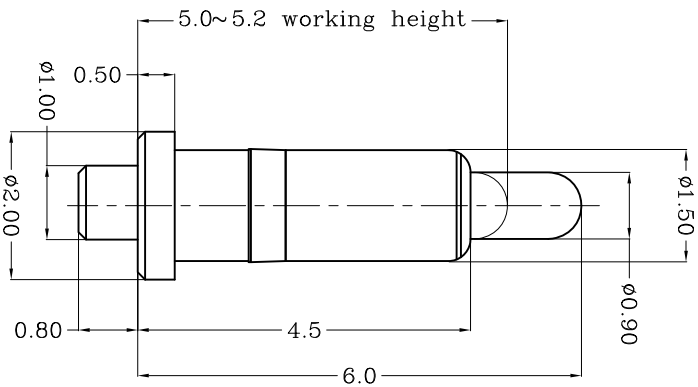

Notes:
 1 Material(材质):

- # OP LINK
- 1) Body : Brass
 - 2) Plunger : Brass
 - 3) Sounding : Stainless steel wire
- ## 2 Plating (电镀):
- 1) Body : Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- ## 3 Mechanical (机械性能):
- 1) Force: 135±25gf per pin at 1.0mm stroke
 - 2) Total stroke(总行程): 1.20mm
 - 3) Durability(寿命): 10,000 cycle min.
- ## 4 Electrical (电性能)
- 1) Contact resistance(接触抵抗): 30mOhm Max.
 - 2) Voltage rating(额定电压): 36V DC Max
 - 3) Current rating(额定电流): 2.0A

LDC				NAME	PGGD PIN PG-1.0-0.8-2.0-0.5-1.5-4.5-6.0		
-	NEW		2010/07/23	SURF TEXTURE:	32/ V	ANGLE: 1°	
DIST	REVISION RECORD	APVD	DATE	REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	SCALE 1:1	A4	DWG NO. C-101449
-					SHEET 1 OF 1	REV 1	

101449-1		PART NUMBER	
MATERIAL		HT TR	FIN
		—	— ✓
DWN	APVD	Top-Link Electronics L.td.	
Qlm			
CHK	REL		
NAME			
PGGD PIN			
PG-1.0-0.8-2.0-0.5-1.5-4.5-6.0			
SCALE	A4	DWG NO.	SHEET
1:1		C-101449	1 OF 1
			REV
			1

USED ON