


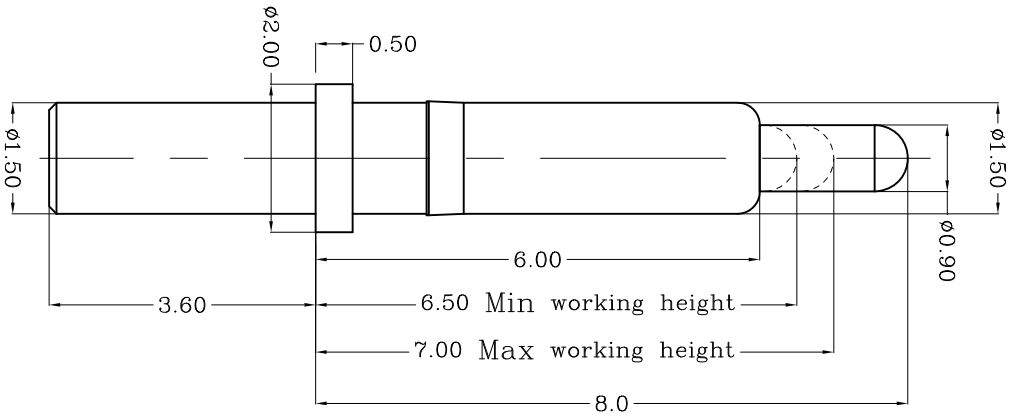

| Table 1 Mechanical performance |            |                |
|--------------------------------|------------|----------------|
| Max working height             | 7.00mm     | 80gf min <2.1> |
| Min working height             | 6.50mm     | 200gf Max      |
| Durability                     | 10000cycle |                |

1 Dimensions shall be interpreted per ASME Y14.5M.  
2 Mechanical performance(See the table 1)  
3 <2.>The force is the average of forces obtained when plunger  
4 goes downwards and upwards.  
5 <2.>Warning:Working height are not permitted to be less  
6 than 1.1m working height.  
7  
8 Electrical performance  
9 Resistance: 30mOhm Max.Current rating: 2.0A  
10 RoHS compliant.

| Item | Part name | Q'ty/Ea' | Material             | Finish             |
|------|-----------|----------|----------------------|--------------------|
| 1    | Body      | 1        | Leaded Brass         | Au plating over Ni |
| 2    | Plinger   | 1        | Leaded Brass         | Au plating over Ni |
| 3    | Spring    | 1        | Stainless steel wire | —————              |
| 4    |           |          |                      |                    |
| 5    |           |          |                      |                    |

[illegible]