



DIST

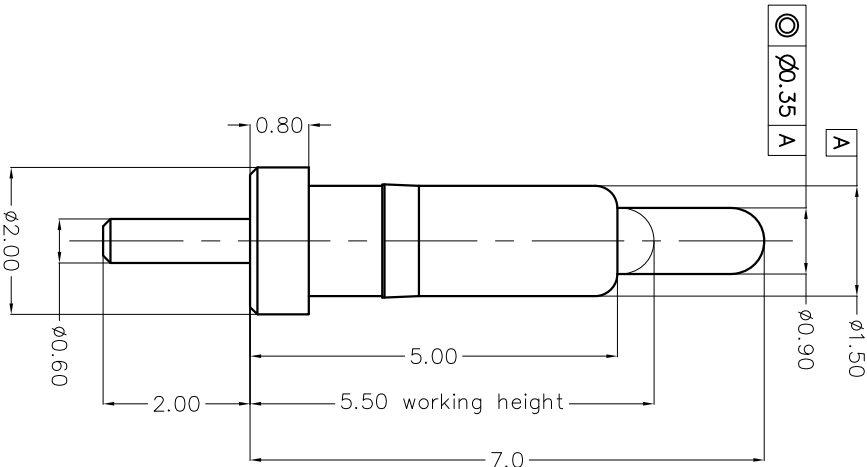


Table 1 Mechanical performance		
working height	5.50mm	80±35gf <2.1>
Durability	10000cycle	

Not

1 Demnisions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<2.1> The force is the average of forces obtained when plunger goes downwards and upwards.

<2.2> Total stroke : 1.9mm.

3 Electrical performance

Resistance: 30mOhm Max.Current rating: 2.0A

4 RoHS compliant.

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leoded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

NEW		2011/12/12
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight		
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin zuozhong	APVD:		<i>top-Link Electronics</i>	Top-Link Electronics Ltd.	
0.0 = ±0.15		CHK:		REL:				
0.00 = ±0.10								
0.000 = ±0.05								
Angle: ±1°								
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.		Name POGO PIN						
		Scale	Size	DWG No.	C-101568	Page	1/1	Rev. 1
		1:1	A4					