

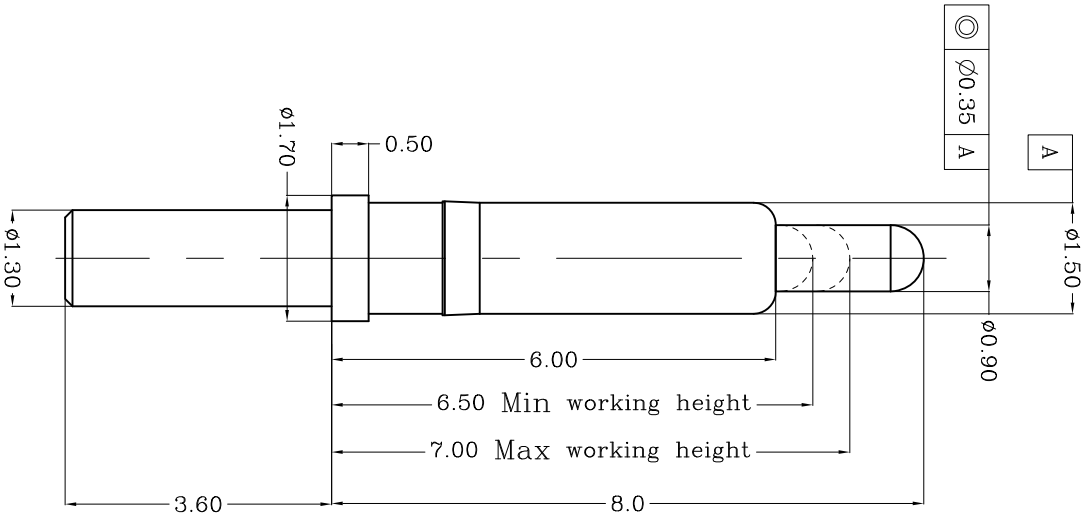


Table 1 Mechanical performance		
Max working height	7.00mm	80gf min <2.1>
Min working height	6.50mm	200gf Max
Durability	10000cycle	

- Not
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2> Warning: Working height are not permitted to be less than min working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.Current rating: 2.0A
 - 4 RoHS compliant.

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

	Update	2012/10/09
	NEW	2012/09/26
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Unit		Weight	PART NUMBER
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm			
0.0	± 0.15	DWN:	APVD:			
0.00	± 0.10	CHK:	REL:			
0.000	± 0.05	Angle: ±1°	Name			
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES RO.05 MAX. DO NOT SCALE PRINT.		POGO PIN		Scale	Size	DWG No.
				1:1	A4	C-101666
						Page 1/1
						Rev. B