




proposal

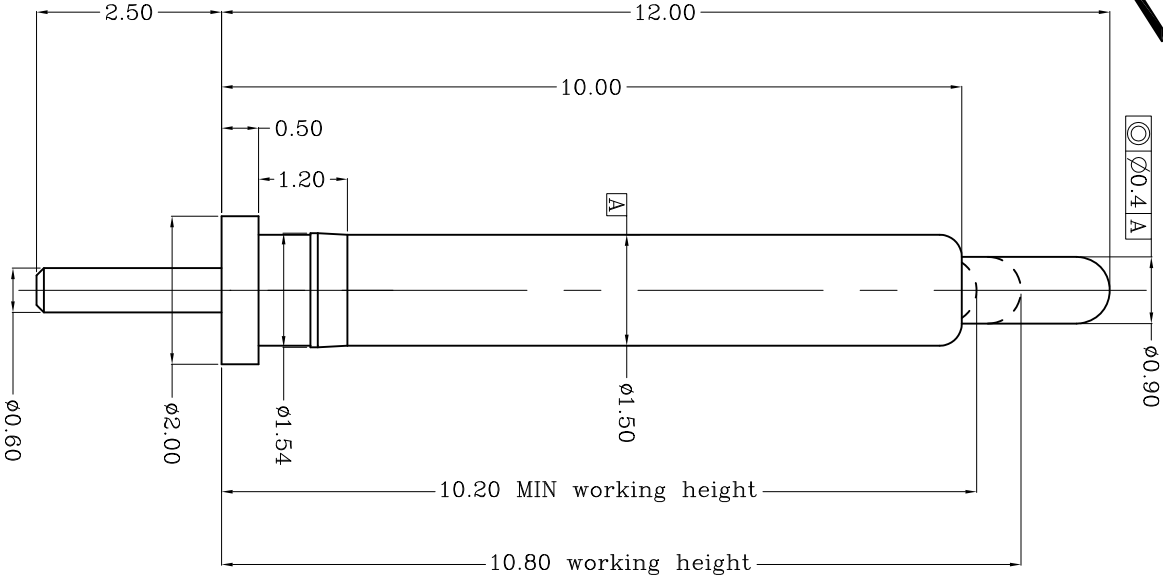

Rev.	Revision record.	Date.
NEW		2012/10/23

Top-Link Electronics Ltd.			
TOLERANCES UNLESS OTHER SPECIFIED			
0.0	±0.15	APVD:	
0.00	±0.10	CHK:	REL:
0.000	±0.05	NAME	POGO PIN
Angle: ±1°		Scale	1:1
SURF. TEXTURE:		Size	A4
REMOVE BURRS:		DWG No.	C-101673
BREAK SHARP EDGES		Page	1/1
SCALE PRINT:		Rev.	1

Table 1 Mechanical performance		
working height	10.80mm	120±25gf <2.1>
Durability	10,000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	
4				
5				

Not
1 Demnnsions shall be interpreted per ASME Y14.5M.
2 Mechanical performance(See the table 1)
<2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
<2.1> Warning: Working height are not permitted to be less than 10.20mm working height.
3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 3.0A
4 RoHS compliant.

101673-1	PART NUMBER
----------	-------------