

proposal

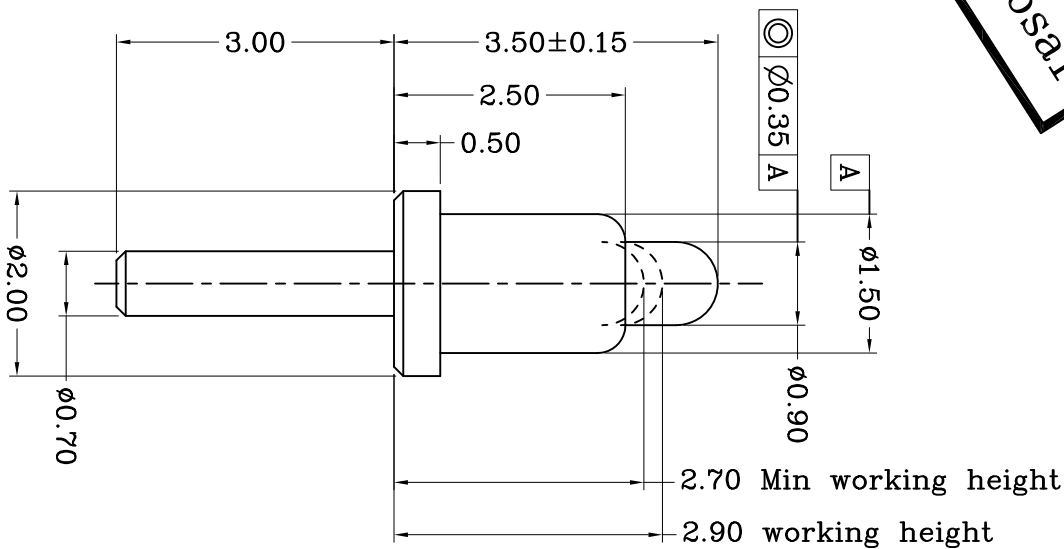


Table 1 Mechanical performance		
working height	2.90mm	80±30gf
Durability	10000cycle	

Item	Part name	Qty/Ea	Material	Finish
1	Body	1	Leoded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leoded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	————
4				
5				

2 Mechanical performance(See the table 1)

2. The force is the average of forces obtained when plunger goes downwards and upwards.

2. **Warning:** Working height are not permitted to be less than min working height.

3 Electrical performance

Resistance: 30mOhm Max.

Current rating: 2.0A

4 RoHS compliant.

101746-1
PART NUMBER

		Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	_____	
		TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Cai wanlu	APVD:	Top-Link Electronics Ltd.			
		0.0 = ± 0.15 0.00 = ± 0.10 0.000 = ± 0.01		CHK:	REL:					
1	NEW	2013/05/16		Name POGO PIN						
Rev.	Revision record.	Date.		Scale 1:1	Size A4	DWG No.	C-101746		Page 1/1	Rev. 1