
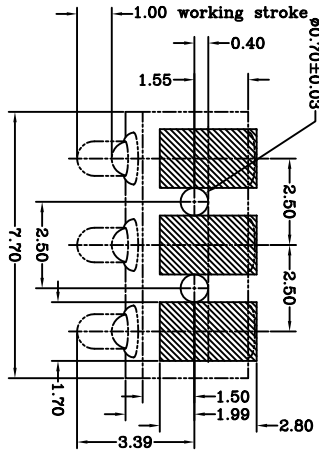



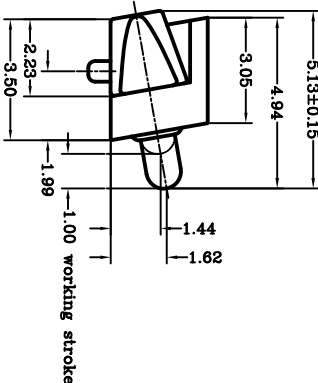




LDC
DIST
-



- Notes:
- 1) Material, Housing: PA 4,6 (30% Glass Filled)
Color: Black. (UL94V-0)
 - 2) Plating: Plating: 0.4um Au over 1.4um Ni
Plating body: 0.1um Au over 1.4um Ni
 - 3) Mechanical
1) Total stroke : 1.5mm
2) Force: 135±30 gf at 1.0mm stroke
3) Durability: 10,000 cycle min.
 - 4) Electrical
1) Contact resistance: 30mOhm Max.
2) Operating voltage: 36VDC Max.

TOP-LINK

Recommended P.C.B.
layout (Component Side)

LDC
DIST
-

Update remark
REVISION
RECORD
APVD
DATE

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 3.2/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	HT TR	FIN	
DWN	APVD		
Benny	Lansing		
CHK	REL		
Andy			
NAME	BATTERY CONNECTOR 3 POS. WITH PILLAR		
SCALE	1:1		
A4	DWG		
NO.	C-100005		
SHEET	1 OF 1		
REV	E		

100005-3
PART NUMBER

USED ON