
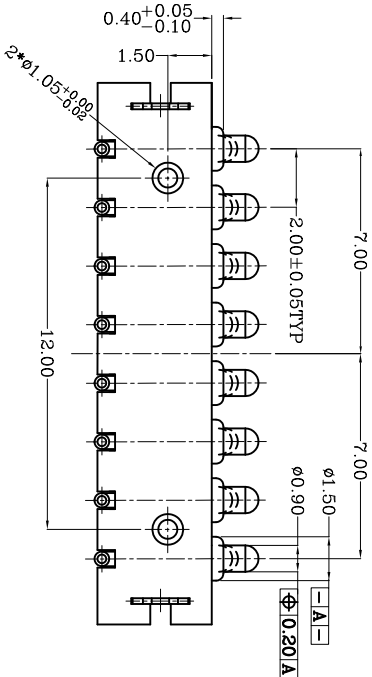
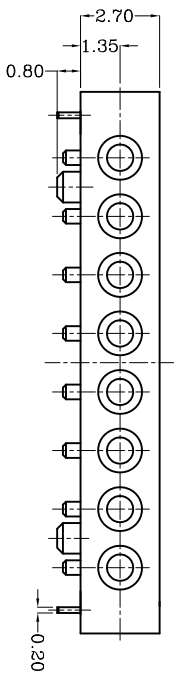


Item	Part name	Qty/Ea	Material	Finish
1	HSG	1	High temp, Plastic(PA 46) UL94 V-0 Color Black	_____
2	Body-1	4	Leaded Brass	Gold 0.1um min plating over Nickel 1.4um plating
	Body-2	4	Leaded Brass	Gold 0.4um min plating over Nickel 1.4um plating
3	Plunger-1	4	Leaded Brass	Gold 0.4um min plating over Nickel 1.4um plating
	Plunger-2	4	Leaded Brass	Gold 0.4um min plating over Nickel 1.4um plating
4	Spring	8	Stainless steel wire	_____
5	LATCH	2	SUS304	Tin plating over Nickel plating

TOP LINK

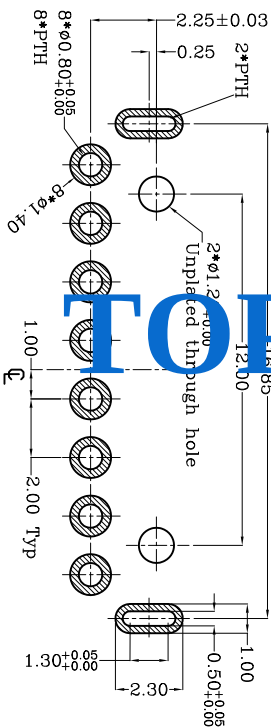

RECOMMENDED P.C.B LAYOUT

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M
- 2 Mechanical performance(See the table 1)
- <2.1>The force is the overage of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working stroke are not permitted to be more than Max working stroke.
- 3 Electrical performance
- Resistance: 20mOhm Max.
- Voltage rating: 250V Min.
- Current rating: Pin-1 2.0A
Pin-2 5.0A
- 4 Packaging Specification conforms to EIA 481
- 5 RoHS compliant.

1001033-8	PART NUMBER
-----------	-------------

1A