






DWG NO.
100257

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



1.00Working Stroke



Notes:

Material(材质):

Housing: LCP Color Black.

Contact: Brass

Spring : Stainless steel wire

2 Plating:

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镀底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镀底1.4um Min)

3 Mechanical:


Spring force: Min 20gf with 0.3mm stroke

110±30gf with 1.0mm stroke.

Total stroke(总行程): 1.40mm

Durability(寿命): 10,000 cycle min.


TOP-LINK

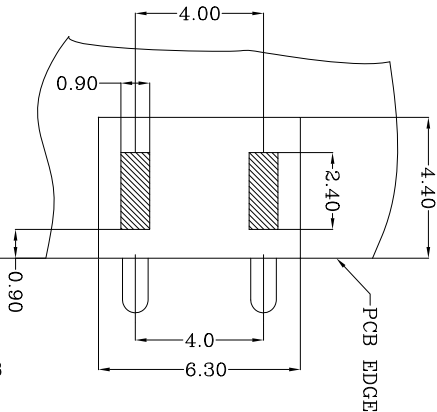

PCB EDGE



Application status 1 焊锡膏, 推荐锡膏厚度为0.10mm IMPORTANT: The recommended thickness of solder paste is 010mm



Application status 2 焊锡膏, 推荐锡膏厚度为0.10mm

Recommended PCB Layout & Application

LDC
-
DIST
-

变更材质		2010/05/12
NEW		2009/01/15
L TR	REVISION RECORD	APVD DATE

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.10		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	HT TR	FIN	
DWN	APVD		
CHK	REL		
NAME POGD CONNECTOR 2 POSITIONS RIGHT ANGLE			
PGC-1.36-6.1-RA-2P-4.0PH			
SCALE 1:1	A4	DWG NO. 100257	
SHEET 1 OF 1			
REV B			

USED ON

-

100257-2

PART NUMBER

A

B

C

D