


DWG NO. C-100583

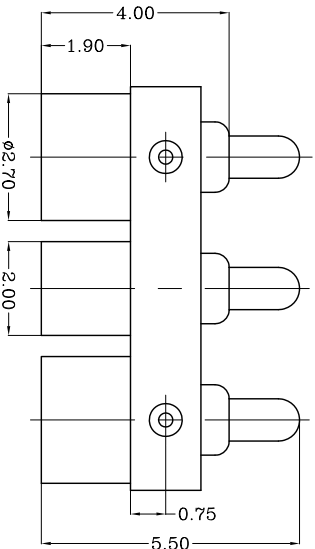

TOP-LINK

Spring : Stainless steel wire

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 鍍金0.4um Min 鍍底1.4um Min)

Durability(寿命): 10,000 cycle min.

Current rating(额定电流): 2.0A

100583-3
PART NUMBER

USED ON

1