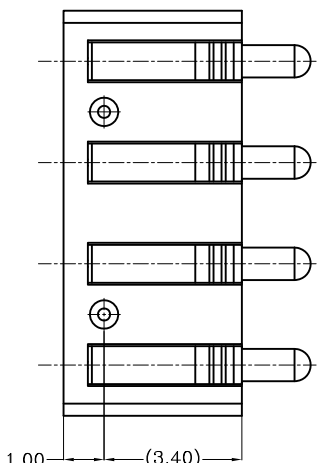


Recommended CB Layout

The Min.working Stroke	0.7mm	Min 100gf <2.1>
The Max.working Stroke	1.10mm	160±35gf
Durability	10000 cycle	

P-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M-1994.
- 2 Mechanical performance (See the table 2)
- <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
- Resistance: 30mOhm Max.; Current: 2A DC
- 4 Packaging Spec.
- 5 RoHS compliant.

100594-4
PART NUMBER