

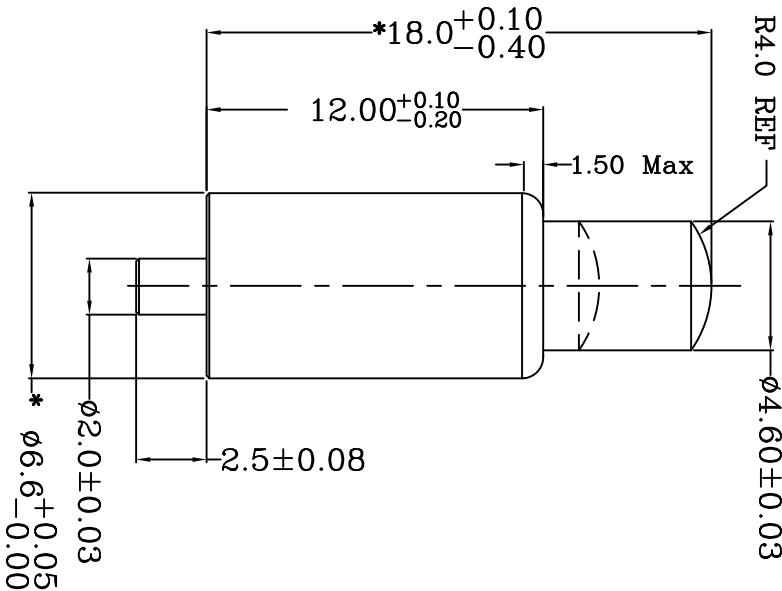




TOP-LINK

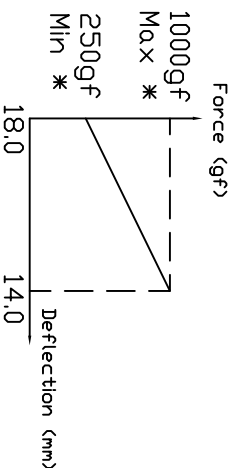

- Notes:
- Material:
- 1)Plunger & Body :Brass C3604
 - 2)Spring : Stainless steel wire
 - 3)Wedge and spring holder: LCP (L304G35)
- Pating
- 1)Body Min 0.125um Au over 1.4um Nickel plating
 - 2)Plunger Min 0.125um Pd over 1.4um Nickel plating
- Mechanical
- 1)Total stroke : 4.0±0.5mm
 - 2)Durability: 10,000 cycle min.
- Electrical
- 1)Contact resistance:20 mΩ max
 - 2)Rate voltage & Current: 12V DC 5A
- 5 Parts must be completely assembled and slide smoothly
 - 6 No rust or grease to be seen on finish part
 - 7 No bending and any other hurt allowed on all parts after riveting.
 - 8 Part must be ROHS compliant and halogen free.
 - 9 The symbol * denotes that dimensions are critical and needs to be included on process inspection.
 - 10 Customer P/N: VP-00006165-005

USED ON

-

LDC
-
DIST
-

renewal	2011/05/27
design change	2009/06/25
Resistance: Fr. 30 to 20 mohm	2009/05/04
NEW	2008/09/22
REVISION RECORD	DATE
APVD	
LTR	

DIMENSIONS IN MM		TOLERANCES UNLESS		OTHER SPECIFIED	
0	= ±	0.0	= ±0.15	0.00	= ±0.10
0.000	= ±	0.000	= ±	0.000	= ±
ANGLE: ±1°					
SURF TEXTURE: 32/					
REMOVE BURRS, BREAK					
SHARP EDGES R0.05 MAX					
DO NOT SCALE PRINT					
MATL	1	HT TR	—	FIN	—
DWN	APVD				
CHK	REL				
NAME	POGO PIN				
SCALE	A4	DWG	C-101273	SHEET	REV
1:1				1 OF 1	D1

101273-1

PART NUMBER

Top-Link
Electronics Ltd.

A

B

C

D

4

3

2

1