


DWN No.:	C-101752
----------	----------

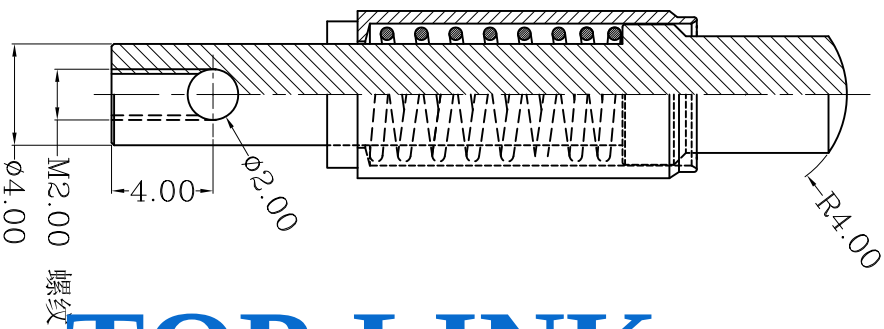

TOP-LINK

Item	Part name	Q'ty/Ea	Material	Finish
1	Body	1	Leaded Brass	Nickel plating
2	Plunger	1	Leaded Brass	Gold plating over Nickel plating
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance

Table 1 Mechanical performance		
Working height	16.5mm	300gf Max<2.1>
Durability	500,000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
- Current rating:10.0A
- 4 RoHS compliant.

Top-Link Electronics Ltd	Type	Unit	Weight
TOLERANCES UNLESS OTHER SPECIFIED	Customer drawing	mm	_____
0.0 = ± 0.15	APVD:		
0.00 = ± 0.10	Col waulu		
0.000 = $\pm$ _____	REL:		
Angle: $\pm 1^\circ$			
SURF TEXTURE:			
REMOVE BURRS.			
BREAK SHARP EDGES			
R0.05 MAXXDO NOT			
SCALE PRINT.			
	Nome	Customer drawing	
	Scale	Size	DWG No.
	1:1	A4	C-101752
			Page 1/1
			Rev. 2