


proposal

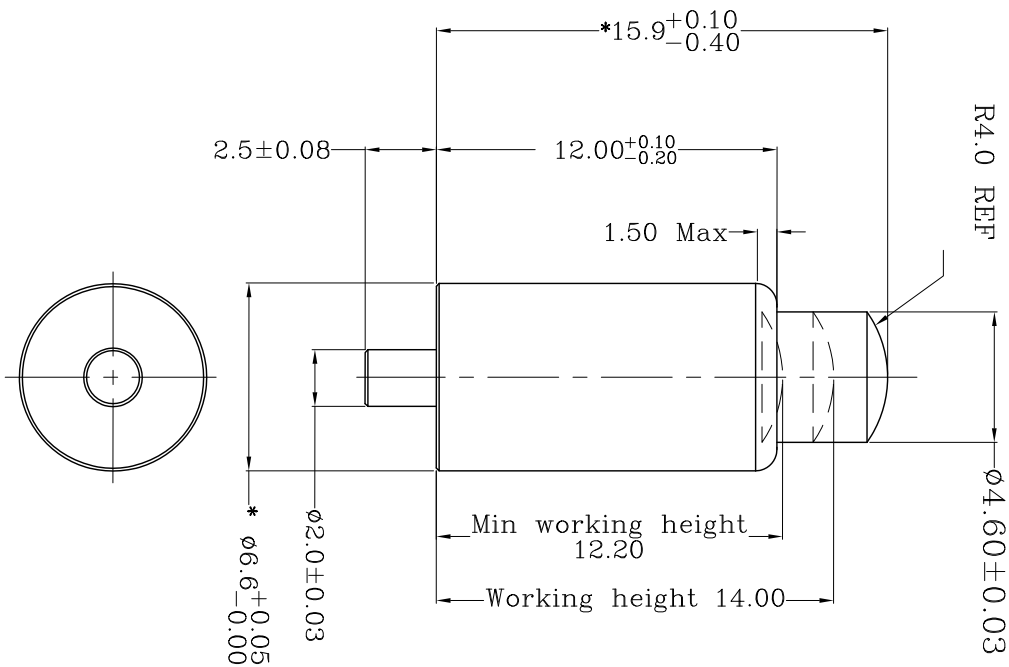

LINK

130±20
30gf
Min *

Deflection (mm)

15.9 14.0 12.2

1 Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.

<2.2>Warning: Working height are not permitted to be less than 1100mm working height.


<2.3>Durability: 10,000 cycle min.

3 Electrical performance

Resistance: 30 mΩ Max.

Current rating: 2.0A

4 RoHS compliant.

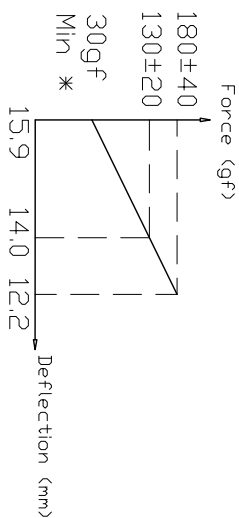

Item	Part name	Qty/Ea	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	——
4	Spring holder	1	LCP	——
5				

Type	Unit	Weight
Customer drawing	mm	

TOLERANCES UNLESS OTHER SPECIFIED	DW: Mins	APVD:
0 ± 0.15		
0.00 ± 0.10	CH:	REL:

Top-Link
Electronics

Top-Link Electronics Ltd.

U:000=H-	Name
Angle=H1	
SURF TEXTURE:	POGO PIN
REMOVE BURRS:	
REMOVE BURRS:	

BREAK R0.05 SCALE	SHARP MAX PRINT.	EGES DO NOT	Scale 1:1	Size A4	DWG No. C-20101010984	Page 1/1	Rev. 2
-------------------------	------------------------	-------------------	--------------	------------	--------------------------	-------------	-----------