




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

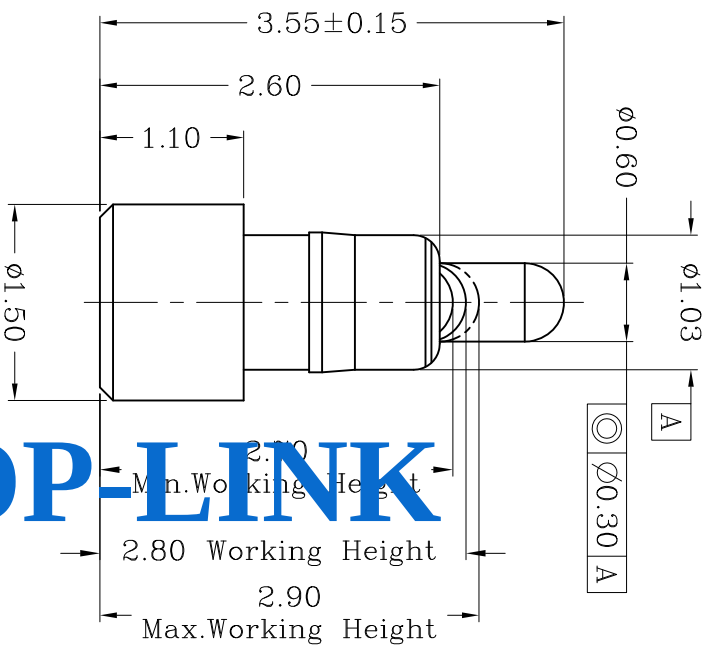

DWN No.:
C-10101011430

proposal

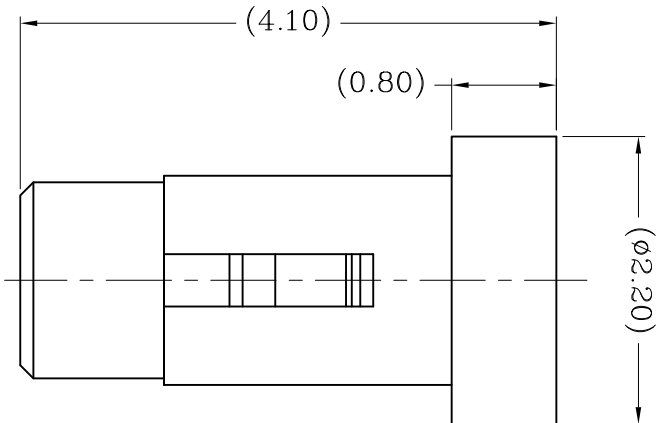

TOP-LINK


Item	Part name	Qty/Ed	Material	Finish
1	Body	1	Leaded Brass	Min Au 0.1um over min Ni 1.4um
2	Plunger	1	Leaded Brass	Min Au 0.4um over min Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4	CAP	1	High temp. Plastic	_____
5			UL94 V-0 Color Black	_____

Table 1 Mechanical performance		
Working Height	2.80mm	60±10gf <2.1>
Durability	10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 50mOhm Max.
Current rating: 1.5A
- 4 Packaging specification conforms to EIA 481
- 5 RoHS compliant.

Recommended PCB Layout

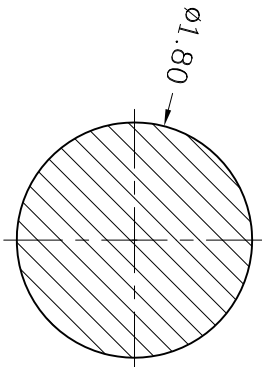

Rev.	Revision record.	Date.
1	NEW	2015/07/07

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	Weight	PART NUMBER
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Cai wanlu	APVD:		10101011430
0.0 = ±0.15		CHK:	REL:			
0.00 = ±0.10		Name				
0.000 = ±0.05		Pogo pin connector				
Angle: ±1°		Scale				
SURF. TEXTURE:		Size				
REMOVE BURRS.		A4				
BREAK SHARP EDGES		DWG No.				
R0.05 MAX. DO NOT SCALE PRINT.		C-10101011430				
		Page				
		1/1				
		Rev.				
		1				

Top-Link Electronics Ltd.