


DWG NO.
C-101180

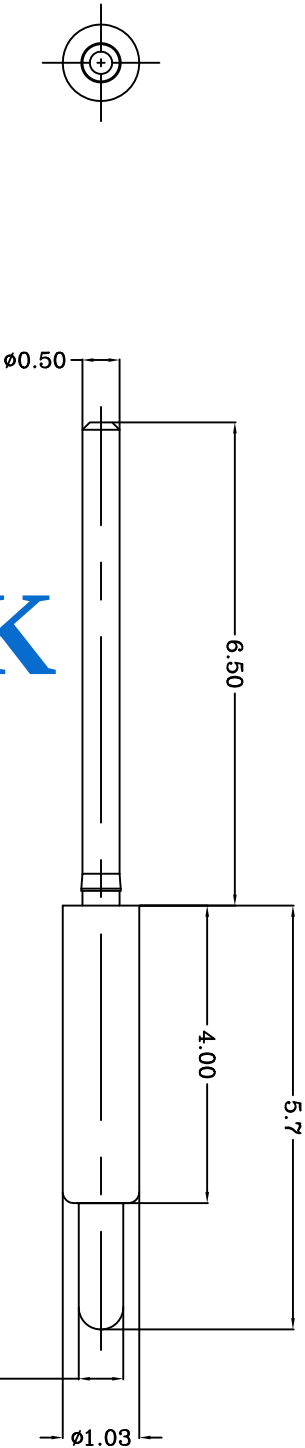

Notes:
Material:

- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2 or CuZn36(C2700).
- 2)Spring : Stainless steel wire
- 2 Plating
 - 1)Body: 0.1um Gold plating over 1.4um Nickle plating
 - 2)Plunger: 0.5um Gold plating over 1.4um Nickle plating
 - 3 Mechanical
 - 1)Durability: 10,000 cycle min.
 - 2)Spring Force: 115±25gf at 1.0mm stroke.
 - 4 Electrical
 - 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC Max.

TOP-LINK

USED ON

-

LDC
-
DIST
-

FILE		DATE
LTR	REVISION	APVD
	RECORD	DATE

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -			0.0	= ±0.15		
0.00	= ±0.10			0.000	= ±		
ANGLE: ±1°							
SURF TEXTURE: 32/							
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX							
DO NOT SCALE PRINT							
MATL	1	HT TR	-	FIN	-		
DWN		APVD	Lansing				
CHK		REL					
Andy							
NAME							
SCALE	1:1	A4	DWG NO.	C-101180			
PGGD PIN							
PG-0.5-6.5-1.03-4.0-5.7							
Top-Link Electronics Ltd.							
PART NUMBER							
101180-1							
SHEET	1 OF 1						
REV	1						