


DWN No.:
C-101633

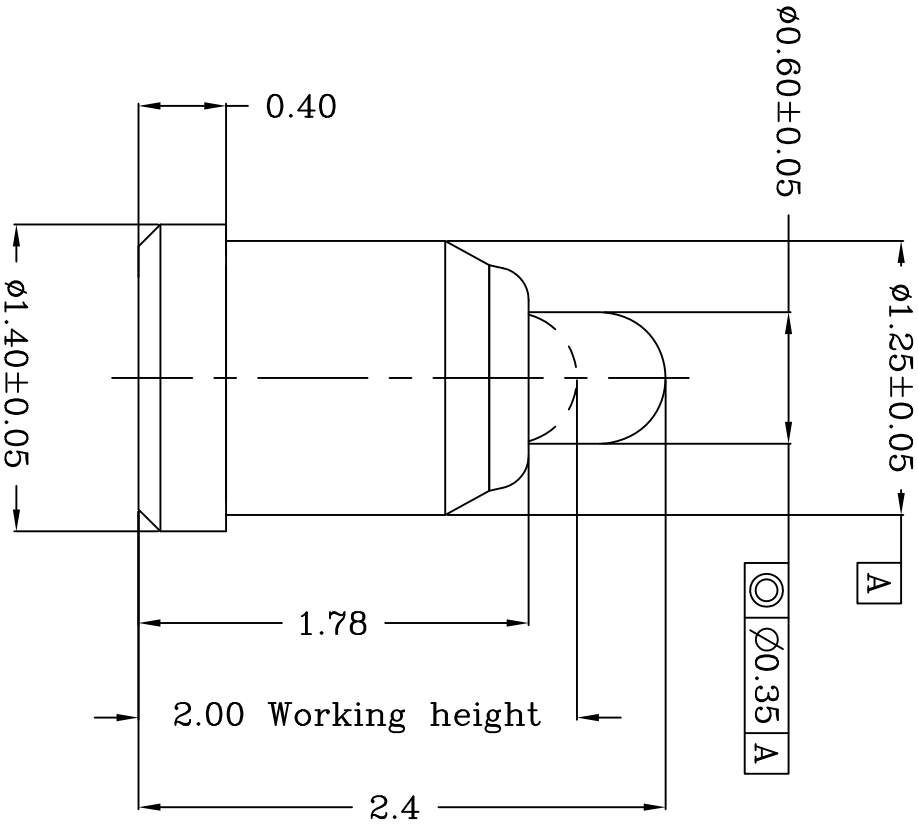

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	
4				
5				

Table 1 Mechanical performance			
working height	2.0mm	60±20gf	<3.1>
Durability	10000cycle		

Not
1 Dem'nsions shall be interpreted per ASME Y14.5M.
2 Mechanical performance(See the table 1)
<3.1> The force is the average of forces obtained when plunger goes downwards and upwards.
3 Electrical performance
Resistance: 50mOhm Max
Current rating: 1.0A
4 Reverse complaint.

Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight	
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	Qin	APVD:			
0.0 = ±0.15	CHK:		REL:			
0.00 = ±0.10						
0.000 = ±0.05						
Angle: ±1°	Name	POGO PIN	PG-1.4-0.4-1.25-1.78-2.40			
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.	Scale	Size	DWG No.	C-101633	Page	1/1
	1:1	A4			Rev.	A

Top-Link Electronics Ltd.

101633-1
PART NUMBER