



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101462

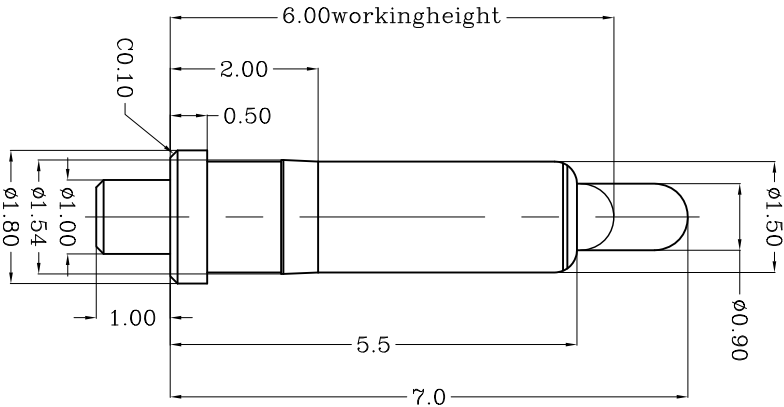

Notes:

- 1) Material (材质):
1) Body : Brass
2) Plunger : Brass
3) Spring : Stainless steel wire
4) Plating (电镀):
1) Bobby: Min 0.1um Gold plating over min. 1.4um Nickel plating
2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)
3) Mechanical (机械性能):
1) Force: Min 90gf per pin at 1.0mm (力: 1.0mm 的力: min 90gf)
2) Total stroke (总行程) : 1.40mm
3) Durability (寿命): 10,000 cycle min.
4) Frictional (电性能)
1) Contact resistance (接触电阻): 30mOhm Max.
2) Voltage rating (额定电压): 36V DC Max
3) Current rating (额定电流): 2.0A

LDC	-
DIST	-

LTR	NEW	REVISION RECORD	APVD	DATE
				2010/10/03

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±	-		0.0	= ±0.10		
0.00	= ±	0.05		0.000	= ±		
ANGLE: ±1°							
SURF TEXTURE: 32/							
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX							
DO NOT SCALE PRINT							
NAME		POGO PIN		PG-1.0-1.0-1.8-0.5-1.5-5.5-7.0			
SCALE		A4		DWG NO. C-101462			
1:1		A4		SHEET 1 OF 1			
CHK		REL		REV 1			
DWN		APVD		Top-Link Electronics Ltd.			
MATERIAL		HT TR		FIN			
1		—		—			

101462-1
PART NUMBER

USED ON

-